

08-10-00

A

Please type a plus sign (+) inside this box → ☐

Approved for use through 09/30/2000. OMB 0651-0032
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

UTILITY PATENT APPLICATION TRANSMITTAL (Only for new nonprovisional applications under 37 C.F.R. § 1.53(b))	Attorney Docket No.	KCX-355(16018)
	First Inventor or Application Identifier	Les Long
	Title	METHOD AND SYSTEM FOR REPLACING.WEB...
	Express Mail Label No.	EL471680903US

APPLICATION ELEMENTS See MPEP chapter 600 concerning utility patent application contents.	ADDRESS TO: Assistant Commissioner for Patents Box Patent Application Washington, DC 20231
1. <input type="checkbox"/> * Fee Transmittal Form (e.g., PTO/SB/17) (Submit an original and a duplicate for fee processing) 2. <input checked="" type="checkbox"/> Specification [Total Pages 20] - Descriptive title of the Invention - Cross References to Related Applications - Statement Regarding Fed sponsored R & D - Reference to Microfiche Appendix - Background of the Invention - Brief Summary of the Invention - Brief Description of the Drawings (if filed) - Detailed Description - Claim(s) - Abstract of the Disclosure 3. <input checked="" type="checkbox"/> Drawing(s) (35 U.S.C. 113) [Total Sheets 8] 4. Oath or Declaration [Total Pages] a. <input type="checkbox"/> Newly executed (original or copy) b. <input type="checkbox"/> Copy from a prior application (37 C.F.R. § 1.63(d)) (for continuation/divisional with Box 16 completed) i. <input type="checkbox"/> <u>DELETION OF INVENTOR(S)</u> Signed statement attached deleting inventor(s) named in the prior application, see 37 C.F.R. §§ 1.63(d)(2) and 1.33(b).	5. <input type="checkbox"/> Microfiche Computer Program (Appendix) 6. Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary) a. <input type="checkbox"/> Computer Readable Copy b. <input type="checkbox"/> Paper Copy (identical to computer copy) c. <input type="checkbox"/> Statement verifying identity of above copies ACCOMPANYING APPLICATION PARTS 7. <input type="checkbox"/> Assignment Papers (cover sheet & document(s)) 8. <input type="checkbox"/> 37 C.F.R. § 3.73(b) Statement of Power of Attorney (when there is an assignee) 9. <input type="checkbox"/> English Translation Document (if applicable) 10. <input type="checkbox"/> Information Disclosure Statement (IDS)/PTO-1449 [Copies of IDS Citations] 11. <input type="checkbox"/> Preliminary Amendment 12. <input checked="" type="checkbox"/> Return Receipt Postcard (MPEP 503) (Should be specifically itemized) * Small Entity 13. <input type="checkbox"/> Statement(s) filed in prior application, Status still proper and desired (PTO/SB/09-12) 14. <input type="checkbox"/> Certified Copy of Priority Document(s) (if foreign priority is claimed) 15. <input checked="" type="checkbox"/> Other: Express Mailing Cert...

* NOTE FOR ITEMS 1 & 13: IN ORDER TO BE ENTITLED TO PAY SMALL ENTITY FEES, A SMALL ENTITY STATEMENT IS REQUIRED (37 C.F.R. § 1.27), EXCEPT IF ONE FILED IN A PRIOR APPLICATION IS RELIED UPON (37 C.F.R. § 1.28).

16. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment:
☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No: _____
 Prior application information: Examiner _____ Group / Art Unit: _____
 For CONTINUATION or DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 4b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

17. CORRESPONDENCE ADDRESS

☐ Customer Number or Bar Code Label (Insert Customer No. or Attach bar code label here) or ☒ Correspondence address below

Name	Jason W. Johnston				
	Dority & Manning, P.A.				
Address	700 East North Street, Suite 15				
City	Greenville	State	SC	Zip Code	29601
Country	U.S.	Telephone	(864) 271-1592	Fax	(864) 233-7342

Name (Pnn/Type)	Jason W. Johnston	Registration No. (Attorney/Agent)	45,675
Signature	<i>Jason Johnston</i>	Date	8/9/00

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

Variable	Mean	Standard Deviation	Minimum	Maximum
Age	34.5	10.2	21	55
Gender	0.52	0.50	0	1
Marital Status	0.68	0.48	0	1
Education	12.5	1.8	9	16
Income	25.5	15.2	10	60
Health	0.75	0.43	0	1
Smoking	0.25	0.43	0	1
Alcohol	0.15	0.36	0	1
Exercise	0.35	0.48	0	1
Stress	0.65	0.48	0	1
Sleep	0.55	0.50	0	1
Appetite	0.65	0.48	0	1
Mood	0.55	0.50	0	1
Energy	0.65	0.48	0	1
Concentration	0.55	0.50	0	1
Memory	0.65	0.48	0	1
Emotion	0.55	0.50	0	1
Behavior	0.65	0.48	0	1
Thought	0.55	0.50	0	1
Feeling	0.65	0.48	0	1
Perception	0.55	0.50	0	1
Attention	0.65	0.48	0	1
Intuition	0.55	0.50	0	1
Imagination	0.65	0.48	0	1
Reasoning	0.55	0.50	0	1
Logic	0.65	0.48	0	1
Analysis	0.55	0.50	0	1
Synthesis	0.65	0.48	0	1
Evaluation	0.55	0.50	0	1
Creation	0.65	0.48	0	1
Innovation	0.55	0.50	0	1
Discovery	0.65	0.48	0	1
Research	0.55	0.50	0	1
Experiment	0.65	0.48	0	1
Observation	0.55	0.50	0	1
Measurement	0.65	0.48	0	1
Calculation	0.55	0.50	0	1
Comparison	0.65	0.48	0	1
Classification	0.55	0.50	0	1
Organization	0.65	0.48	0	1
Management	0.55	0.50	0	1
Leadership	0.65	0.48	0	1
Communication	0.55	0.50	0	1
Interpersonal	0.65	0.48	0	1
Teamwork	0.55	0.50	0	1
Collaboration	0.65	0.48	0	1
Partnership	0.55	0.50	0	1
Relationship	0.65	0.48	0	1
Network	0.55	0.50	0	1
Community	0.65	0.48	0	1
Society	0.55	0.50	0	1
Culture	0.65	0.48	0	1
Tradition	0.55	0.50	0	1
Custom	0.65	0.48	0	1
Habit	0.55	0.50	0	1
Practice	0.65	0.48	0	1
Routine	0.55	0.50	0	1
Pattern	0.65	0.48	0	1
Structure	0.55	0.50	0	1
System	0.65	0.48	0	1
Method	0.55	0.50	0	1
Technique	0.65	0.48	0	1
Strategy	0.55	0.50	0	1
Plan	0.65	0.48	0	1
Design	0.55	0.50	0	1
Model	0.65	0.48	0	1
Framework	0.55	0.50	0	1
Concept	0.65	0.48	0	1
Idea	0.55	0.50	0	1
Thought	0.65	0.48	0	1
Feeling	0.55	0.50	0	1
Perception	0.65	0.48	0	1
Attention	0.55	0.50	0	1
Intuition	0.65	0.48	0	1
Imagination	0.55	0.50	0	1
Reasoning	0.65	0.48	0	1
Logic	0.55	0.50	0	1
Analysis	0.65	0.48	0	1
Synthesis	0.55	0.50	0	1
Evaluation	0.65	0.48	0	1
Creation	0.55	0.50	0	1
Innovation	0.65	0.48	0	1
Discovery	0.55	0.50	0	1
Research	0.65			

(Typed or printed name of person mailing paper or fee)

Lynn D. Hooper

(Signature of person mailing paper or fee)

PATENT

ATTORNEY DOCKET NO.: KCX-355(16018)

UNITED STATES PATENT APPLICATION

ENTITLED

METHOD AND SYSTEM FOR REPLACING WEB FOLDING BOARDS

BY

LES LONG

006020" 20440" 040290

METHOD AND SYSTEM FOR REPLACING WEB FOLDING BOARDS

Background of the Invention

Various types of products, such as facial tissues, napkins, wipes, etc., are folded and stacked, and then cut to length to store in a container or dispenser. For example, facial tissues are commonly folded in a manner such that a consumer can more easily grasp one or more of the tissues from the box. In the past, webs have been folded using a device known as a folding board. For instance, some examples of such folding boards are described in U.S. Patent No. 4,052,048 to Shirasaka.

A folder generally receives a web and, depending on the design of the folding board, folds the web into a certain configuration. In certain instances, it is often desired to utilize more than one folding board to fold one or more webs. For example, during facial tissue converting, a tissue web is continuously unwound from a roll, redirected by a turning bar, folded, and laid down onto previously folded tissue webs to form a continuous stack of tissues. These operations are carried out in a machine known as a multifold that uses multiple folding boards to fold multiple webs.

One problem currently associated with conventional multifolders, however, is that they typically contain only one set of folding boards. To utilize a set of folders having a different size or configuration, the folding boards must be manually interchanged by removing each individual folding board from the line. Unfortunately, such manual interchanging of folding boards can require a substantial amount of time and energy. Moreover, such manual interchanging often results in the misalignment of the folding boards.

As such, a need currently exists for a system and method for more

efficiently replacing a set of folding boards with another set of folding boards.

Summary of the Invention

5 In accordance with one embodiment of the present invention, a
a method for selectively replacing one set of folding boards with another
set of folding boards is disclosed. The method includes the steps of
placing a first set containing at least two folding boards in a web-receiving
position. In some embodiments, the first set and/or second set of folding
boards are rotatable about an axis. The method includes the step of
10 selectively transferring the first set of folding boards from the web-
receiving position to a first inactive position. Moreover, the method also
includes the step of selectively transferring a second set containing at
least two folding boards to the web-receiving position such that the folding
boards within the second set are simultaneously transferred to the web-
15 receiving position. For example, in one embodiment, the step of
selectively transferring the second set of folding boards into the web-
receiving position can be accomplished by rotating the second set about
an axis such that it moves from a first inactive position to the web-
receiving position.

20 In some embodiments, the method can also include the step of
selectively transferring the first set of folding boards from the web-
receiving position to a first inactive position. Moreover, in other
embodiments, the method can include the step of selectively transferring
the first set of folding boards from the web-receiving position to a second
25 inactive position. In such instances, a third set of folding boards may, in
some embodiments, be placed in the second inactive position and
selectively transferred from the second inactive position to the first
inactive position. In one embodiment, the third set of folding boards can
also be rotatable about an axis.

30 In accordance with another embodiment of the present invention, a

a method for selectively replacing one set of folding boards with another set of folding boards is disclosed. The method includes the steps of placing a first set of folding boards in a web-receiving position and placing a second set of folding boards in a first inactive position. Each set of folding boards is rotatable about an axis. The method includes the step of selectively rotating the second set of folding boards from the first inactive position to the web-receiving position. Further, the method includes the step of selectively rotating the first set of folding boards from the web-receiving position to either the first inactive position or a second inactive position. In some instances, a third set of folding boards may, in some embodiments, also be placed in the second inactive position and selectively rotated from the second inactive position to the first inactive position.

In accordance with still another embodiment of the present invention, a system for selectively replacing one set of folding boards with another set of folding boards is disclosed. The system includes a first frame assembly secured to a first set of folding boards and a second frame assembly secured to a second set of folding boards. The first frame assembly and/or the second frame assembly can, in some embodiments, contain a frame that is continuous or discontinuous.

Each frame assembly is rotatable about an axis into a web-receiving position. In addition, the second frame assembly is in operative communication with the first frame assembly such that the second frame assembly and the first frame assembly are simultaneously rotatable about an axis. For example, in some embodiments, the first frame assembly and said second frame assembly are connected to at least one mounting arm. In one embodiment, to induce rotation of the first frame assembly and second frame assembly, a rotary actuator can be utilized. In another embodiment, rotation can be induced by a motor.

In some embodiments of the present invention, the system can

contain a locking assembly for selectively locking a set of folding boards into the web-receiving position. For example, in one embodiment, the locking assembly includes a locking pin, which may, in some instances, also be provided with an air channel for removing dust from a set of folding boards located at said web-receiving position.

Other features and aspects of the present invention are discussed in greater detail below.

Brief Description of the Drawings

A full and enabling disclosure of the present invention, including the best mode thereof, directed to one of ordinary skill in the art, is set forth more particularly in the remainder of the specification, which makes reference to the appended figures in which:

Figure 1 is a perspective view of one embodiment of a system of the present invention;

Figure 2 is a side view of the embodiment of the system depicted in Fig. 1;

Figure 3 is a front view of the embodiment of the system depicted in Fig. 1;

Figure 4 is a perspective view of another embodiment of a system of the present invention;

Figure 5 is a side view of the embodiment of the system depicted in Fig. 4;

Figure 6 is a perspective view of still another embodiment of a system of the present invention;

Figure 7 is a top view of one embodiment of a locking assembly that can be used in the present invention;

Figure 8 is a cross-sectional view of the locking assembly shown in Figure 7 taken along a line 8-8 in Fig. 7; and

Figure 9 is a side view of another embodiment of a system of the present invention.

Repeat use of reference characters in the present specification and drawings is intended to represent same or analogous features or elements of the invention.

Detailed Description of Representative Embodiments

5 Reference now will be made in detail to various embodiments of the invention, one or more examples of which are set forth below. Each example is provided by way of explanation of the invention, not limitation of the invention. In fact, it will be apparent to those skilled in the art that various modifications and variations can be made in the present invention without departing from the scope or spirit of the invention. For instance, features illustrated or described as part of one embodiment, can be used on another embodiment to yield a still further embodiment. Thus, it is intended that the present invention cover such modifications and variations as come within the scope of the appended claims and their equivalents.

10 In general, the present invention is directed to a method and system for selectively replacing one set of folding boards with another set of folding boards. In one embodiment of the present invention, the system includes a first frame assembly secured to a first set of folding boards and a second frame assembly secured to a second set of folding boards. Each frame assembly is rotatable about an axis such that the assemblies are capable of moving in and out of a web-receiving position. By utilizing a system and method of the present invention, it has been discovered that a set of folding boards can be quickly and efficiently replaced with another set of folding boards.

20 Referring to Fig. 1, for example, one embodiment a system 10 of the present invention is shown that is capable of selectively replacing one set of folding boards for another set of folding boards. As referred to herein, a "set" of folding boards generally includes one or more folding boards. For example, as shown in Fig. 2, a first set 12 can contain four

25

30

folding boards 20, 21, 23, and 25. In other embodiments, as shown in Fig. 6, a set can include a single folding board 93 or a set can include folding boards 93, 94 and 95.

Any conventional folding board may be utilized in the present invention to impart any type of fold to one or more webs. Specifically, it should be understood that the present invention is not limited to any particular folding board type, size, or design. In fact, any device, assembly, or mechanism that is capable of imparting one or more folds to one or more webs can be utilized as a folding board in the present invention. For example, some suitable folding boards are described in U.S. Patent Nos. 3,401,927 to Frick; 4,052,048 to Shirasaka; 4,502,675 to Clark, et al.; 5,868,276 to Loppnow, et al.; and 5,992,682 to Loppnow, et al., which are incorporated herein in their entirety by reference thereto.

Referring to Figs. 1-4, some specific examples of folding boards that can be used in the present invention are illustrated. As shown in Fig. 2, the first set 12 includes folding boards 20, 21, 23, and 25. The folding boards 20, 21, 23, and 25 can be designed to fold one or more webs into a variety of different fold configurations. In this embodiment, for example, the folding board 21 is configured to impart an interfolded, V-fold to the web. Moreover, the folding board 25 is configured to impart a conventional C-fold to a web. However, it should also be understood that any other type of fold can be imparted by the folding boards 20, 21, 23, and 25. Moreover, it should also be understood that the folds imparted by the folding boards may be identical or different.

Referring to Fig. 1, in one embodiment of the present invention, the first set 12 of folding boards is initially provided in a web-receiving position 100. At the web-receiving position 100, the folding boards of the first set 12 are capable of receiving one or more webs, such as tissue webs, which can be provided by an unwinding roll (not shown). For example, as

shown in Figs. 1-3, two continuous webs can be provided by an unwinding roll (not shown) to be folded by the folding board 21. In one embodiment, the first web can initially pass through guide bars 14 and 15 at an angle of about 45 degrees, while a second web can be passed through guide bars 15 and 45 at an angle of about 45 degrees. Thereafter, the path of the first web is deflected by a turning bar 16 and the path of the second web is deflected by a turning bar 18. From the turning bars 16 and 18, the second web and first web, which is superimposed over the second web, are both maneuvered under a panel 46 of the folding board 21. The folding board 21 then folds the moving webs into a certain fold configuration.

In one embodiment, a second set 42 of folding boards can also be provided in a first inactive position 200. In addition, other sets of folding boards may also be utilized. For example, referring to Fig. 4, a third set 48 of folding boards can be provided in a second inactive position 300. Moreover, referring to Fig. 9, a fourth set 49 of folding arms can be provided in a third inactive position 400. At the first inactive position 200, second position 300, or third position 400, the folding boards are typically not used to fold webs. However, it should be understood that, in some embodiments, a set of folding boards provided at the first inactive position 200, the second inactive position 300, or the third inactive position 400 may be used to fold one or more webs. Moreover, other types of operations may occur at the first inactive position 200, the second inactive position 300, or the third inactive position 400, such as cleaning, sanitizing, etc.

Furthermore, in some embodiments, the web-receiving position 100 can actually contain more than one position. For instance, as shown in Fig. 9, the web-receiving position 100 contains an intermediate position 100a and an end position 100b. For example, in one embodiment, the

first set 12 of folders is placed in an intermediate position 100a. At the intermediate position 100a, the first set 12 of folding boards can then be moved along a rail 97 into the end position 100b, where it can receive one or more webs. In this embodiment, the first set 12 of folding boards has
5 wheels that enable the first set 12 to be more easily moved on a track formed by the rail 97.

In accordance with one embodiment of the present invention, the first set 12 of folding boards can be selectively replaced with the second set 42 of folding boards. For instance, referring to Figs. 1-3, the folding
10 boards of the first set 12 are each mounted to a frame assembly 22. In this embodiment, the frame assembly 22 includes a frame 26 that is secured to the folding boards via a mounting rail 24. The frame 26 may be continuous, such as shown in Fig. 1, or discontinuous, as shown in Fig 6. When utilized, for example, a discontinuous frame 26 can allow a set
15 containing the folding boards 93, 94 and 95 to be rotated about the axis A without rotating the other folding boards.

Similarly, the folding boards of the second set 42 are each secured to a frame assembly 50. The frame assembly 50 may include a frame 51 that is secured to the folding boards via a mounting rail 52. The frame 51
20 may also be continuous or discontinuous, as described above. As shown, in one embodiment the frames 26 and 51 are secured to opposing ends 53 and 55 of two mounting arms 56. In some embodiments, the mounting arms 56 are capable of rotating about an axis A such that the frames 26 and 51 can also be rotated thereabout.

For example, as shown in Figs. 4-5, one embodiment of the present invention includes a rotary actuator 80 that is capable of rotating one or more mounting arms 56 about an axis A. As shown, the mounting
25 arms 56 are rotatably secured to the rotary actuator 80 via a shaft 79. In this embodiment, the rotary actuator 80 is mounted to upstanding

members 77 to anchor the system 10 thereto. Any conventional rotary actuator can be utilized in the present invention to impart rotation to the mounting arms 56. For example, one suitable rotary actuator is an HP Series rack-and-pinion rotary actuator made by Parker-Hannifin Corporation.

When utilized, the rotary actuator 80 can rotate the mounting arms 56 approximately 180 degrees in either a clockwise or counter-clockwise direction. For example, a rotary actuator 80 can rotate the mounting arms 56 in a clockwise direction such that the third set 48 of folding boards is rotated to the web-receiving position 100, the second set 42 of folding boards is rotated to and the first set 12 of folding boards is rotated to the first inactive position 200. Moreover, to return the sets of folding boards to their initial positions, the rotary actuator 80 can rotate the mounting arms 56 in a counter-clockwise direction such that the first set 12 of folding boards is located in the web-receiving position 100 and the second set 42 of folding boards is located in the first inactive position 200. In addition to utilizing a rotary actuator 80, manual rotation or any device capable of automatically rotating the mounting arms 56 can generally be utilized. For example, referring to Fig. 1, a motor/gearbox arrangement 61 can also be used to rotate the mounting arm 56 about an axis A. As shown, the mounting arms 56 are rotatably secured to the motor/gearbox arrangement 61 via a shaft 63. In this embodiment, the motor/gearbox arrangement 61 is mounted to upstanding members 77 to anchor the system 10 thereto. Any known motor/gearbox arrangement can generally be utilized to impart rotation to the mounting arms 56. When utilized, the motor/gearbox arrangement 61 can rotate the mounting arms 56 up to 360 degrees in either a clockwise or counter-clockwise direction. For example, a motor/gearbox arrangement 61 can rotate the mounting arms 56 in a clockwise direction such that the second set 42 of folding boards is

rotated to the web-receiving position 100 and the first set 12 of folding boards is rotated to the first inactive position 200. Moreover, to return the sets of folding boards to their initial positions, the motor/gearbox arrangement 61 can further rotate the mounting arms 56 in a clockwise direction such that the first set 12 of folding boards is located in the web-receiving position 100 and the second set 42 of folding boards is located in the first inactive position 200.

In some embodiments, once positioned in the web-receiving position 100, the first set 12 or second set 14 of folding boards can be locked into the web-receiving position 100 to ensure adequate alignment of the folding boards with a web. In general, any suitable mechanism for locking a set of folding boards into the web-receiving position 100 can be utilized. For instance, referring to Figs. 1-8, in one embodiment, a locking pin 86 is utilized to inhibit rotation of the mounting arms 56 so that a set of folding boards can be locked into the web-receiving position 100. In particular, as shown in Figs. 7-8, the locking pin 86 is movably secured within a locking assembly 88 and can extend into a hollow chamber 84 that is connected to the end 55 of the mounting arms 56. The locking assembly 88 is attached to the upstanding member 77 so that when the pin 86 is extended into the hollow chamber 84 and remains therein, the arm 56 does not rotate further.

In one embodiment, as shown in Figs. 1 and 7-8, the locking pin 86 can be extended and retracted through the use of air pressure. For example, the locking pin 86 is depicted in Figs. 7-8 in its retracted state.

Air pressure can be supplied to a port 83 to force the pin 86 into the hollow chamber 84 (See Fig. 8). In particular, the air extends the pin 86 in a longitudinal direction (to the left in Fig. 8) into the hollow chamber 84. A spring 87 can be utilized to ensure that the pin 86 remains extended even if the air pressure is released.

To remove the pin 86 from the hollow chamber 84, the air pressure may then be released from the port 83 and supplied to a port 81 so that the pin 86 is forced back into its retracted state, as shown in Fig. 8. The air pressure supplied by the ports 81 and 83 can be provided by an air source (not shown) via hoses 82.

In some embodiments, the system 10 may also be provided with a mechanism for removing dust from various parts of the system. For example, dust commonly accumulates within the guide bars and turning bars. In one embodiment, to remove the dust within these bars, the pin 86 can be provided with an air channel 89 extending in a lengthwise direction through the center of the pin 86. A port 85 can supply air pressure to the air channel 89 when the pin 86 is extended. The pressurized air can flow through the air channel 89 and into one or more of the guide bars and/or turning bars via a hose (not shown) or other similar air transport mechanism.

Once locked into the web-receiving position 100, a set of folding boards can then receive and fold one or more continuous webs. As shown in Fig. 1, for example, the first set 12 of folding boards can receive a web when locked into the web-receiving position 100. To replace the folding boards with other folding boards, the pin 86 can be retracted and the mounting arms 56 can be rotated about an axis A until the second set 42 of folding boards is in the web-receiving position 100. At that point, the second set 42 of folding boards can be locked into position as described above to receive and fold one or more continuous webs.

After being folded, the web(s) can then be stacked and cut for packaging. For example, in one embodiment, as shown in Fig. 1, a conveyor 90 can transport the folded webs to another location. In the embodiment illustrated herein, a lift mechanism (not shown) can raise and/or lower the conveyor 90 so that it is capable of being placed into

communication with a web passing through the folding boards. For example, in some instances, the conveyor 90 can be lowered to allow the second set 42 of folding boards to be rotated in a counter-clockwise direction to the web-receiving position 100.

5 To facilitate the replacement of a set of folding boards, a system of the present invention may also include a variety of control features. For example, one embodiment of the present invention includes at least one controller. The controller can be a programmable logic computer (PLC), such as an Allen-Bradley Controllogix Processor, although any other
10 controller suitable for controlling the system described above, is generally acceptable. Alternately, hard-wired circuitry, relays, software, etc., could be substituted for the PLC and used as the controller.

A controller can generally be utilized to monitor and/or adjust one or more of the attributes of system 10 in response to operator input or to
15 one or more sensors. Referring to Fig. 8, for instance, a sensor 99 is illustrated that can detect the position of the locking pin 86. In particular, before replacing one set of folding boards for another, a controller communicates with the sensor 99 to verify that the locking pin 86 is retracted. Moreover, before feeding one or more webs to a set of folding
20 boards, one or more controllers also communicate with the sensor 99 to verify that the locking pin 86 is extended. Moreover, other sensors, such as photoelectric sensors, can be utilized to detect a variety of system attributes.

In accordance with another aspect of the invention, a related
25 method is provided for selectively replacing a set of folding boards for another set of folding boards. In one embodiment, for example, the method includes the step of placing a first set 12 containing at least two folding boards in a web-receiving position 100. The method further includes the step of placing a second set 42 containing at least two folding

boards in a first inactive position 200. The second set 42 of folding boards can then be selectively transferred from the first position 200 to the web-receiving position 100. During transfer, the folding boards within the second set 42 are simultaneously transferred from the first inactive position 200 to the web-receiving position 100. In some embodiments, the first set 12 of folding boards may also be selectively transferred to the first inactive position 200. In other embodiments, the first set 12 of folding boards may be selectively transferred to a second inactive position 300. The step(s) of selectively transferring the second set 42 and/or first set 12 of folding boards may be accomplished by rotating the set(s) about an axis A.

The method and system of the present invention can generally be utilized to fold one or more webs. The webs may be made of the same type or different types. For example, the webs may be paper webs, such as facial tissue, bath tissue, paper towels, and the like, as well as other types of webs, such as wet-wipes, and the like. Further, the webs can also be folded to different widths utilizing a system of the present invention. For instance, in one embodiment, the first set 12 of folding boards can be utilized to form folded tissue webs having a certain width, while a second set 42 of folding boards having a different width can be selectively interchanged therefor to form folded tissue webs of different widths. For example, the first set 12 of folding boards can be utilized to fold tissue webs in a C-fold to a width of about 150 millimeters, while the second set 42 of folding boards can be selectively interchanged with the first set 12 of folding boards to fold tissue webs in a C-fold to a width of about 110 millimeters.

While the invention has been described in detail with respect to the specific embodiments thereof, it will be appreciated that those skilled in the art, upon attaining an understanding of the foregoing, may readily

WHAT IS CLAIMED IS:

1. A method for selectively replacing one set of folding boards with another set of folding boards in a system for folding webs, said method comprising the steps of:

5 placing a first set containing at least two folding boards in a web-receiving position;

 selectively transferring said first set of folding boards from said web-receiving position to a first inactive position; and

 selectively transferring a second set containing at least two folding
10 boards to said web-receiving position such that the folding boards of said second set are simultaneously transferred to said web-receiving position.

2. A method as defined in claim 1, wherein said second set of folding boards is initially placed in said first inactive position before being transferred to said web-receiving position.

15 3. A method as defined in claim 1, wherein said second set of folding boards is initially placed in a second inactive position before being transferred to said web-receiving position.

 4. A method as defined in claim 3, further comprising the steps of:
 selectively transferring a third set containing at least two folding
20 boards from said second inactive position to said first inactive position such that the folding boards within said third set are simultaneously transferred from said second inactive position to said first inactive position.

 5. A method as defined in 1, wherein said second set of folding
25 boards is rotatable about an axis such that the step of selectively transferring said second set to said web-receiving position is accomplished by rotating said second set about said axis.

 6. A method as defined in claim 5, wherein said first set of folding boards is also rotatable about said axis.

30 7. A method as defined in claim 6, further comprising the step of:

selectively rotating said first set of folding boards about said axis from said web-receiving position to said first inactive position.

8. A method as defined in claim 6, further comprising the step of selectively rotating said first set of folding boards about said axis from said web-receiving position to a second inactive position.

9. A method as defined in claim 8, further comprising the steps of: selectively rotating a third set of folding boards from said second inactive position to said first inactive position such that the folding boards within said third set are simultaneously transferred from said second inactive position to said first inactive position.

10. A method for selectively replacing one set of folding boards with another set of folding boards in a system for folding webs, said method comprising the steps of:

placing a first set of folding boards in a web-receiving position, said first set of folding boards being rotatable about an axis;

placing a second set of folding boards in a first inactive position, said second set of folding boards being rotatable about said axis; and

selectively rotating said second set of folding boards about said axis from said first inactive position to said web-receiving position; and

selectively rotating said first set of folding boards about said axis from said web-receiving position to either said first inactive position or a second inactive position.

11. A method as defined in claim 10, further comprising the step of selectively rotating said first set of folding boards from said web-receiving position to said first inactive position.

12. A method as defined in claim 10, further comprising the step of selectively rotating said first set of folding boards from said web-receiving position to said second inactive position.

13. A method as defined in claim 12, further comprising the steps of:

placing a third set of folding boards in said second inactive position, said third set of folding boards being rotatable about said axis; and

selectively rotating said third set of folding boards from said second inactive position to said first inactive position.

5 14. A system for selectively replacing a first set of folding boards with a second set of folding boards, said system comprising:

a first frame assembly secured to a first set of folding boards, said first frame assembly being rotatable about an axis for placing said first set of folding boards into a web-receiving position;

10 a second frame assembly secured to a second set of folding boards, said second frame assembly being rotatable about said axis such that said second set of folding boards is also capable of being placed into said web-receiving position;

15 said second frame assembly being in operative communication with said first frame assembly such that said second frame assembly and said first frame assembly are simultaneously rotatable about said axis.

15 15. A system as defined in claim 14, wherein said first frame assembly and said second frame assembly are connected to at least one mounting arm.

20 16. A system as defined in claim 14, wherein the rotation of said first frame assembly and said second frame assembly is induced by a rotary actuator.

25 17. A system as defined in claim 14, wherein the rotation of said first frame assembly and said second frame assembly is induced by a motor.

18. A system as defined in claim 14, further comprising a locking assembly for selectively locking a set of folding boards into said web-receiving position.

30 19. A system as defined in claim 18, wherein said locking assembly comprises a locking pin.

20. A system as defined in claim 18, wherein said pin is provided with an air channel for removing dust from a set of folding boards located at said web-receiving position.

5 21. A system as defined in claim 14, wherein said first frame assembly comprises a continuous frame.

22. A system as defined in claim 14, wherein said first frame assembly comprises a discontinuous frame.

24. A system as defined in claim 14, wherein said second frame assembly comprises a continuous frame.

10 25. A system as defined in claim 14, wherein said second frame assembly comprises a discontinuous frame.

006050 " 2044E960

Abstract of the Disclosure

A system and method for selectively replacing one set of folding boards for another set of folding boards is provided. The system can include a first frame assembly secured to a first set of folding boards. The first set of folding boards can be initially placed in a web-receiving position for receiving and folding webs, such as tissue webs. The system can also include a second frame assembly secured to a second set of folding boards, which is placed in another position. The first set of folding boards at the web-receiving position can then be selectively replaced by the second set of folding boards. For example, in one embodiment, each frame assembly can be simultaneously rotated about an axis to replace the first set with the second set.

006080" 2014E3612

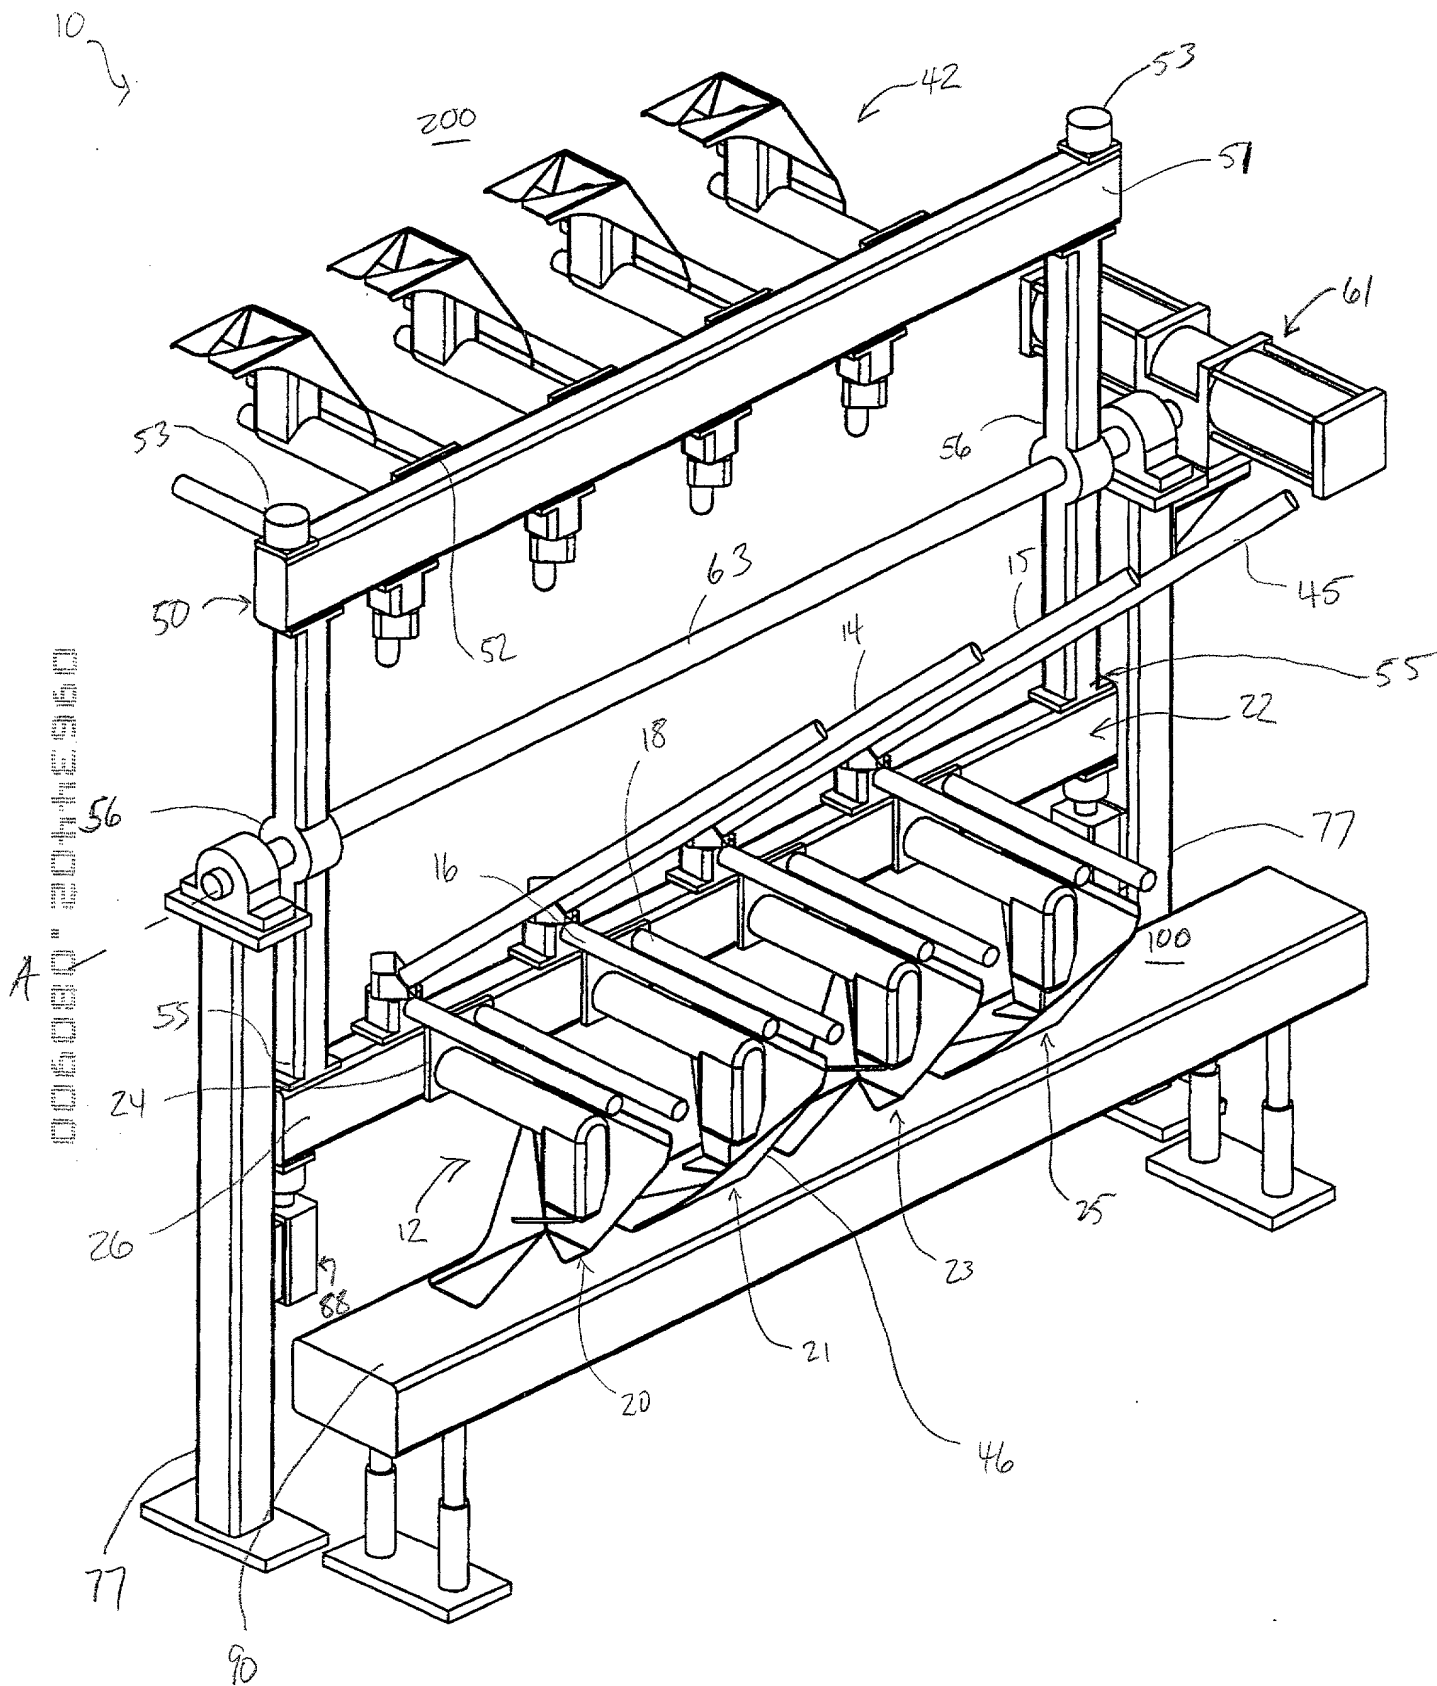


FIGURE 1

Physical characteristics	
Age	2.7 yr
Weight	12.7 kg
Height	100 cm
Weight/height ratio	12.7 kg/m ²
Biochemical characteristics	
Age	2.7 yr
Weight	12.7 kg
Height	100 cm
Weight/height ratio	12.7 kg/m ²
Clinical characteristics	
Age	2.7 yr
Weight	12.7 kg
Height	100 cm
Weight/height ratio	12.7 kg/m ²
Laboratory characteristics	
Age	2.7 yr
Weight	12.7 kg
Height	100 cm
Weight/height ratio	12.7 kg/m ²
Treatment characteristics	
Age	2.7 yr
Weight	12.7 kg
Height	100 cm
Weight/height ratio	12.7 kg/m ²
Outcome characteristics	
Age	2.7 yr
Weight	12.7 kg
Height	100 cm
Weight/height ratio	12.7 kg/m ²

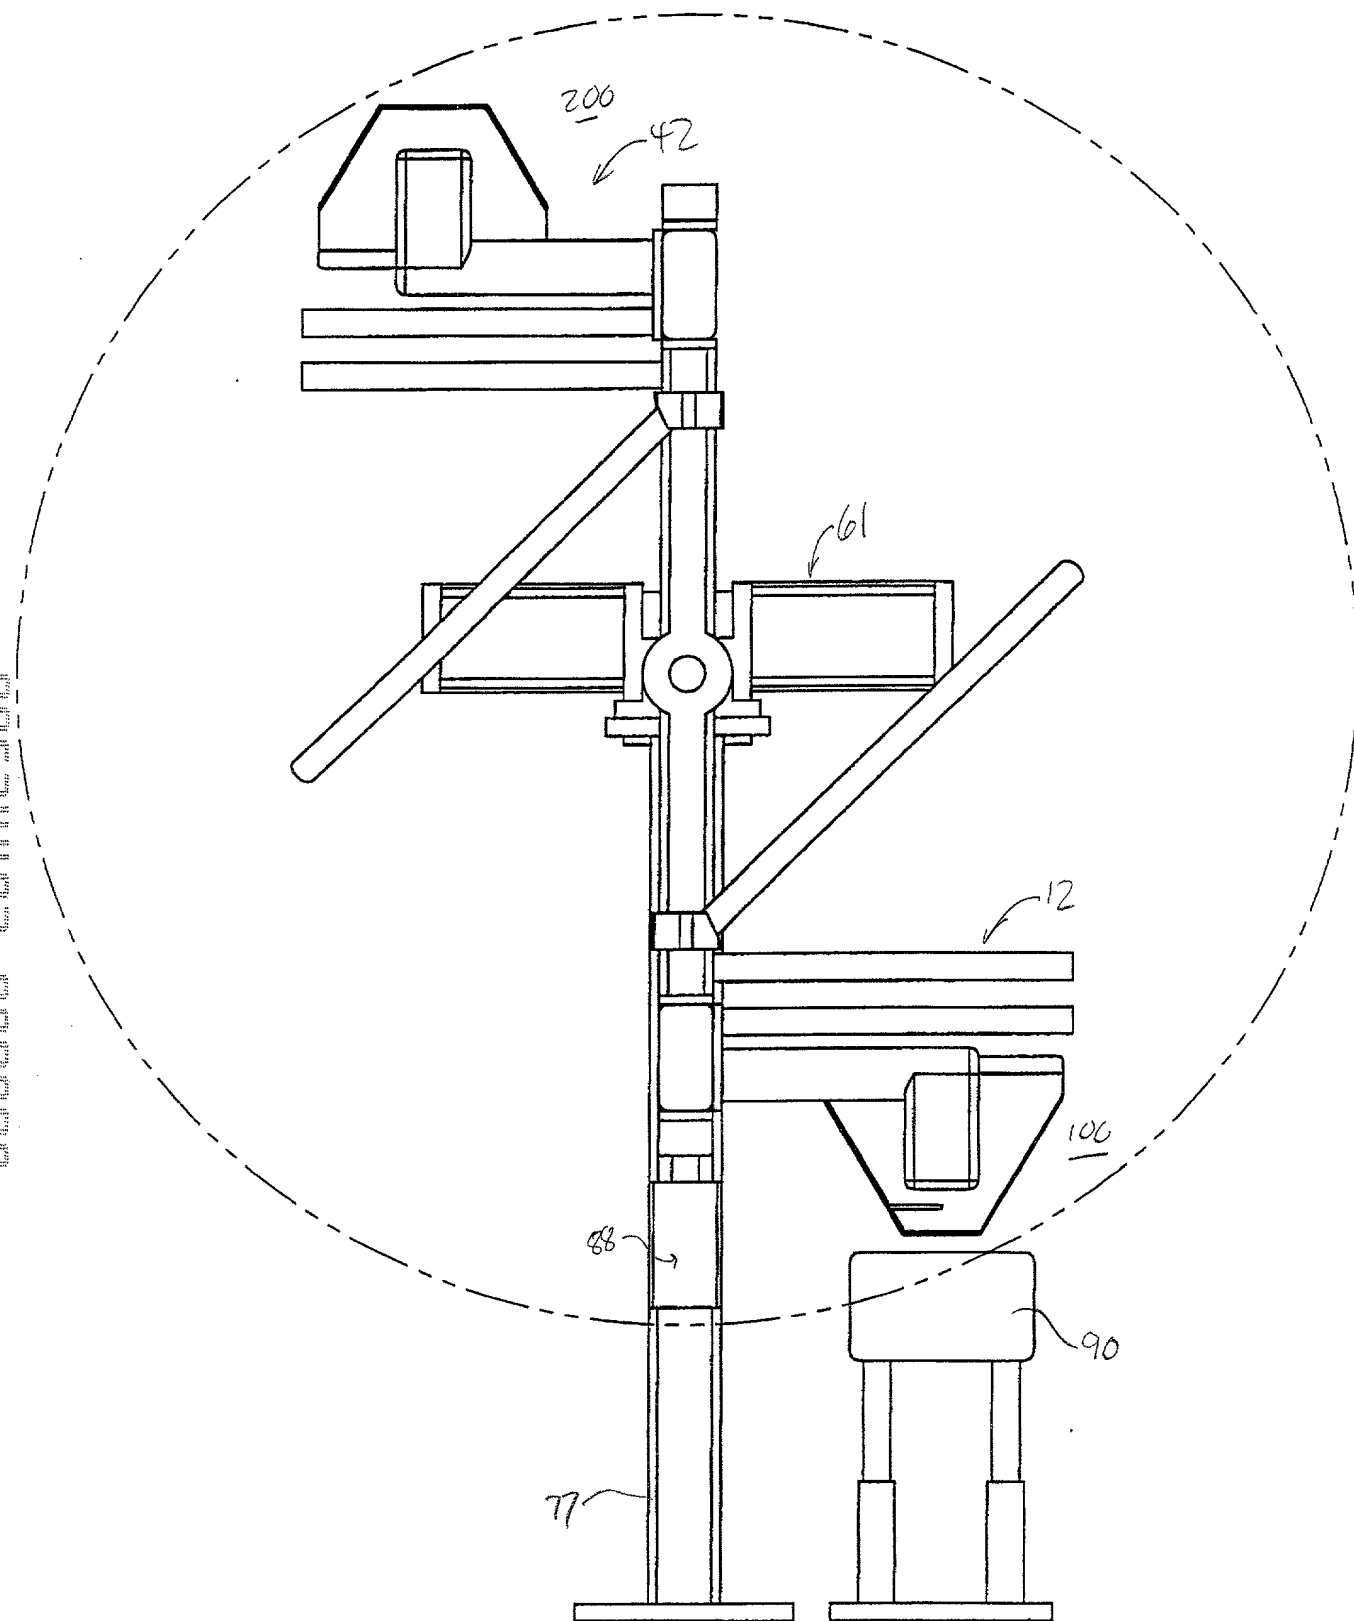


FIGURE 2

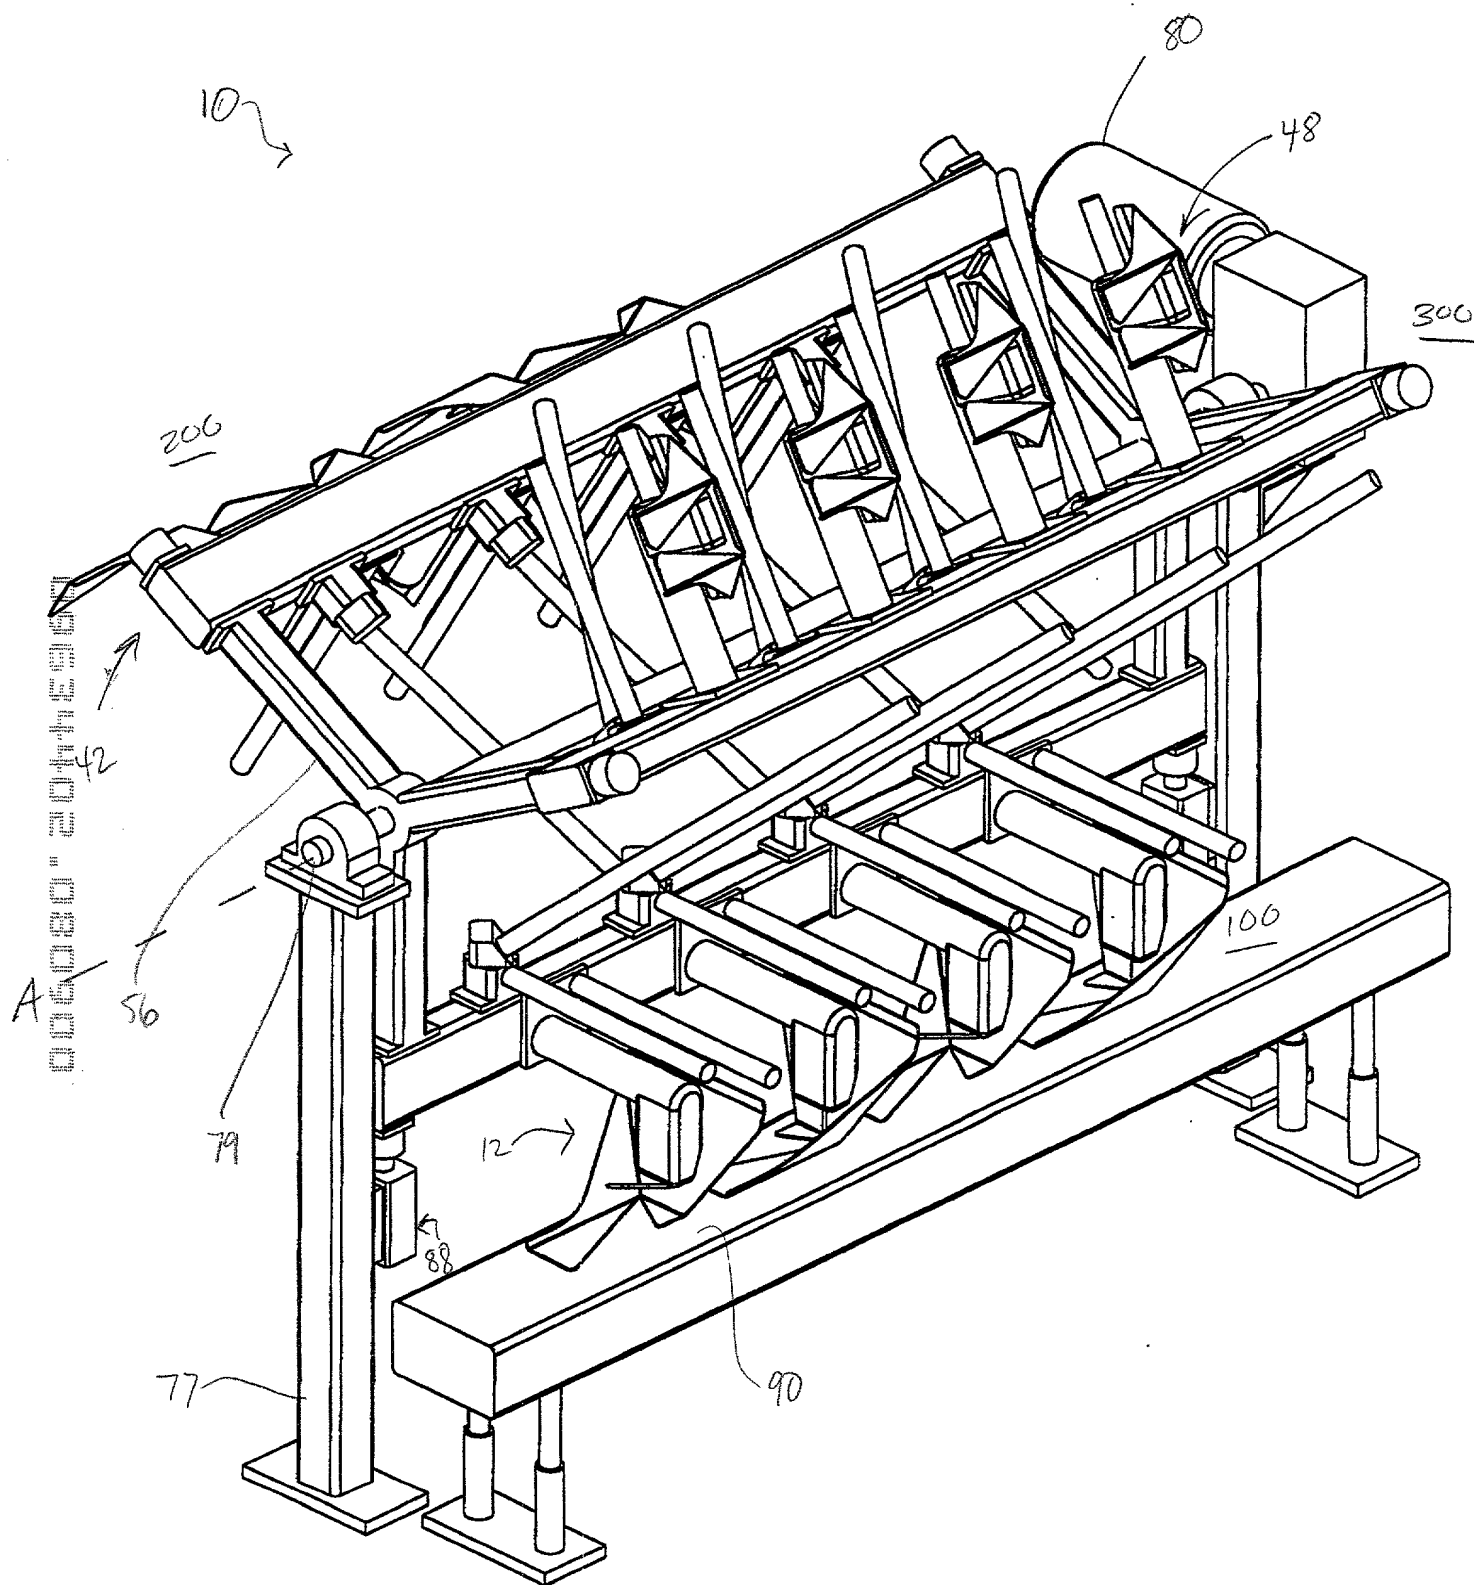


FIGURE 4

	1980	1981	1982	1983	1984	1985	1986	1987	1988	1989	1990	1991	1992	1993	1994	1995	1996	1997	1998	1999	2000	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029	2030	2031	2032	2033	2034	2035	2036	2037	2038	2039	2040	2041	2042	2043	2044	2045	2046	2047	2048	2049	2050	2051	2052	2053	2054	2055	2056	2057	2058	2059	2060	2061	2062	2063	2064	2065	2066	2067	2068	2069	2070	2071	2072	2073	2074	2075	2076	2077	2078	2079	2080	2081	2082	2083	2084	2085	2086	2087	2088	2089	2090	2091	2092	2093	2094	2095	2096	2097	2098	2099	2100	2101	2102	2103	2104	2105	2106	2107	2108	2109	2110	2111	2112	2113	2114	2115	2116	2117	2118	2119	2120	2121	2122	2123	2124	2125	2126	2127	2128	2129	2130	2131	2132	2133	2134	2135	2136	2137	2138	2139	2140	2141	2142	2143	2144	2145	2146	2147	2148	2149	2150	2151	2152	2153	2154	2155	2156	2157	2158	2159	2160	2161	2162	2163	2164	2165	2166	2167	2168	2169	2170	2171	2172	2173	2174	2175	2176	2177	2178	2179	2180	2181	2182	2183	2184	2185	2186	2187	2188	2189	2190	2191	2192	2193	2194	2195	2196	2197	2198	2199	2200	2201	2202	2203	2204	2205	2206	2207	2208	2209	2210	2211	2212	2213	2214	2215	2216	2217	2218	2219	2220	2221	2222	2223	2224	2225	2226	2227	2228	2229	2230	2231	2232	2233	2234	2235	2236	2237	2238	2239	2240	2241	2242	2243	2244	2245	2246	2247	2248	2249	2250	2251	2252	2253	2254	2255	2256	2257	2258	2259	2260	2261	2262	2263	2264	2265	2266	2267	2268	2269	2270	2271	2272	2273	2274	2275	2276	2277	2278	2279	2280	2281	2282	2283	2284	2285	2286	2287	2288	2289	2290	2291	2292	2293	2294	2295	2296	2297	2298	2299	2300	2301	2302	2303	2304	2305	2306	2307	2308	2309	2310	2311	2312	2313	2314	2315	2316	2317	2318	2319	2320	2321	2322	2323	2324	2325	2326	2327	2328	2329	2330	2331	2332	2333	2334	2335	2336	2337	2338	2339	2340	2341	2342	2343	2344	2345	2346	2347	2348	2349	2350	2351	2352	2353	2354	2355	2356	2357	2358	2359	2360	2361	2362	2363	2364	2365	2366	2367	2368	2369	2370	2371	2372	2373	2374	2375	2376	2377	2378	2379	2380	2381	2382	2383	2384	2385	2386	2387	2388	2389	2390	2391	2392	2393	2394	2395	2396	2397	2398	2399	2400	2401	2402	2403	2404	2405	2406	2407	2408	2409	2410	2411	2412	2413	2414	2415	2416	2417	2418	2419	2420	2421	2422	2423	2424	2425	2426	2427	2428	2429	2430	2431	2432	2
--	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	---

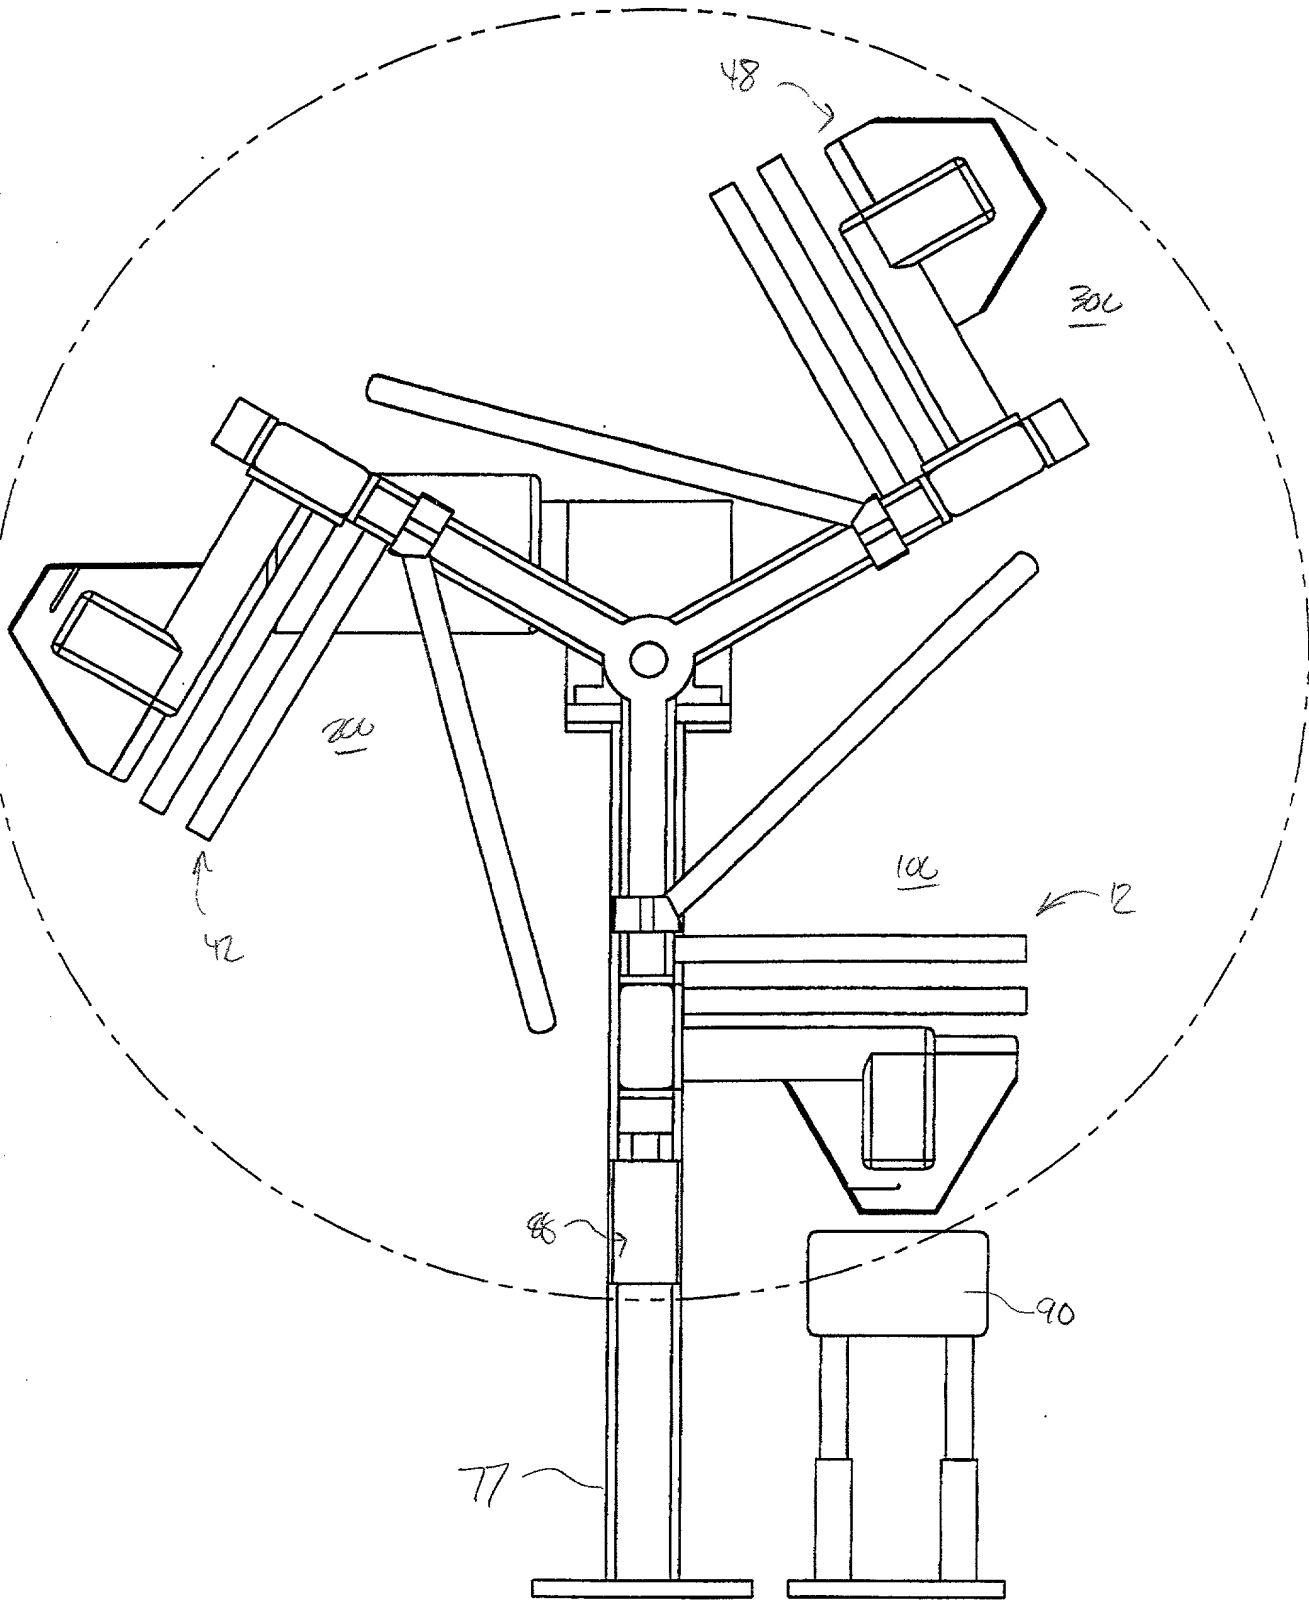


FIGURE 5

006080" 2044560

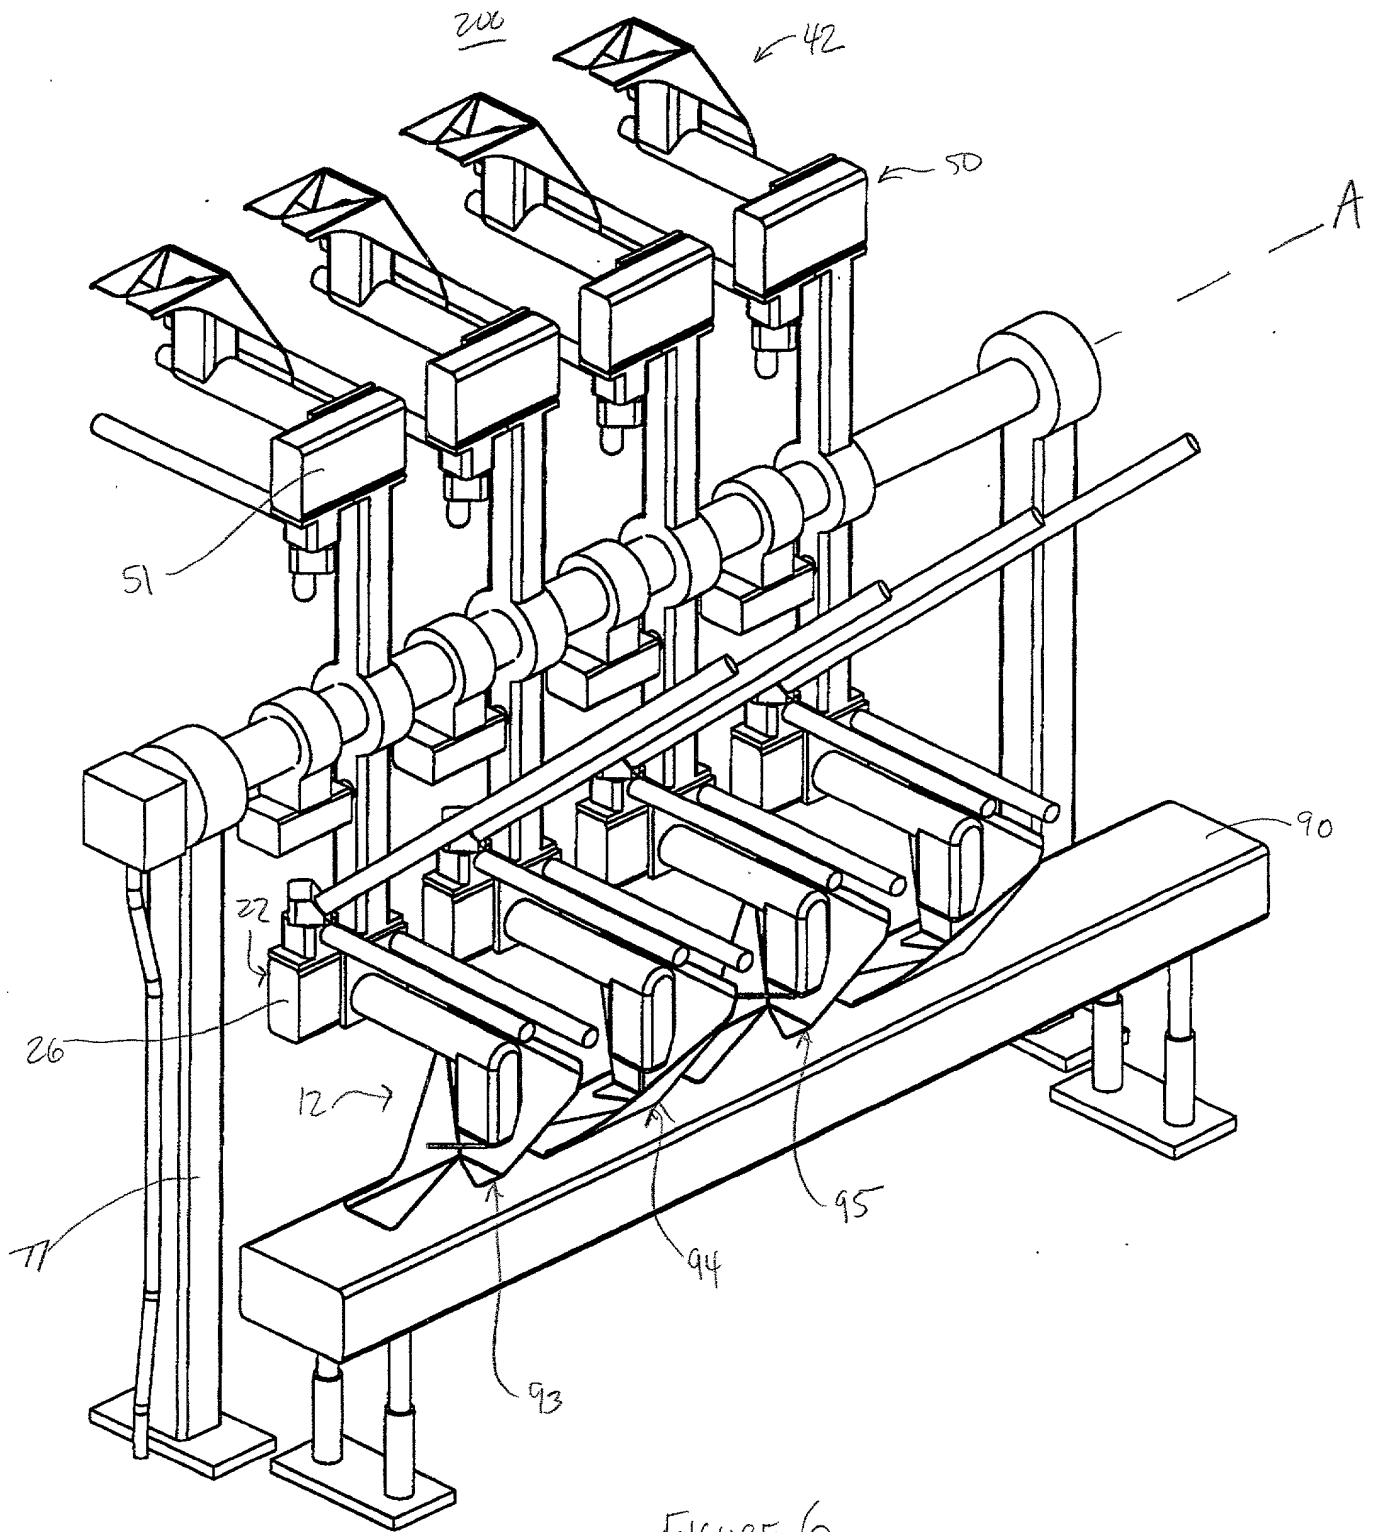


FIGURE 6

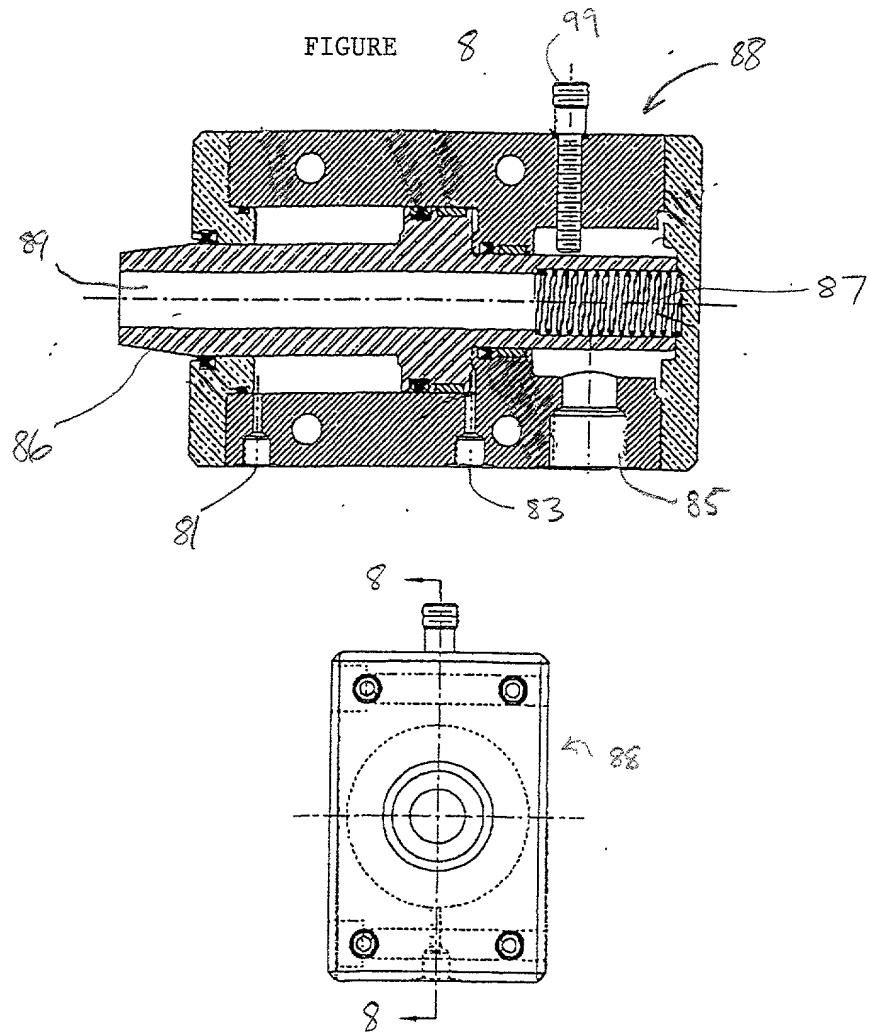


FIGURE 7

006080" 2044E 960

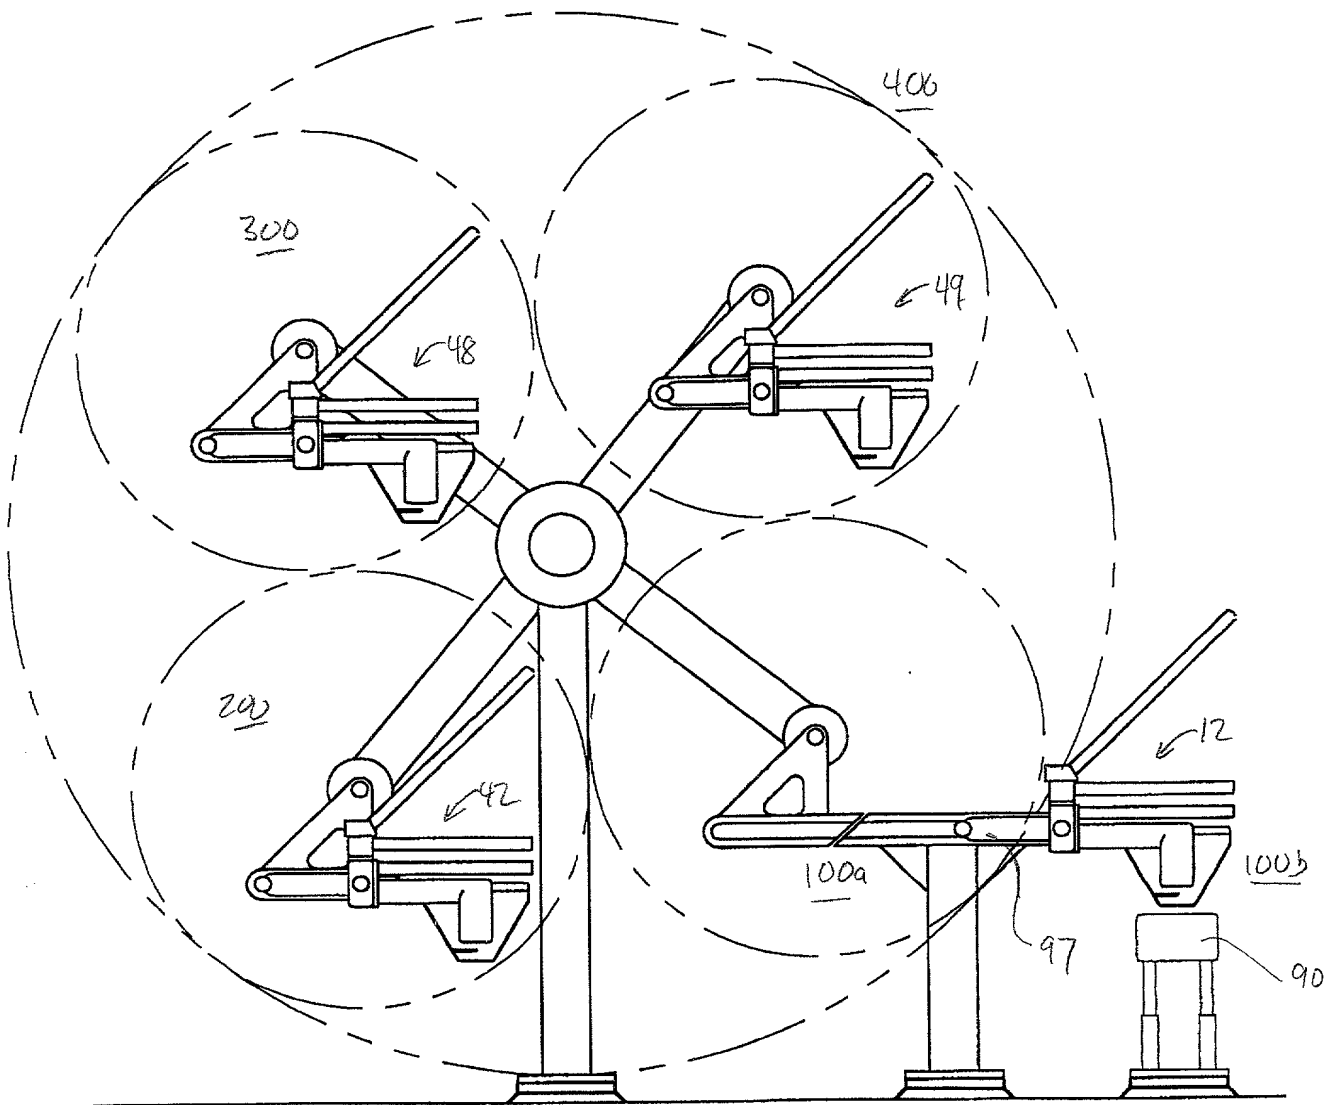


FIGURE 9